

# Insulated Panels **COLOR CHART**



★ ENERGY STAR Qualified Color


## SIGNATURE® 300 Standard Stocked Colors | KYNAR 500®, HYLAR 5000® | Low Gloss



## SIGNATURE® 300 Standard Non-Stocked Colors | KYNAR 500®, HYLAR 5000® | Low Gloss



## SIGNATURE® 300 Standard Non-Stocked Metallic Colors | KYNAR 500®, HYLAR 5000® | Low Gloss

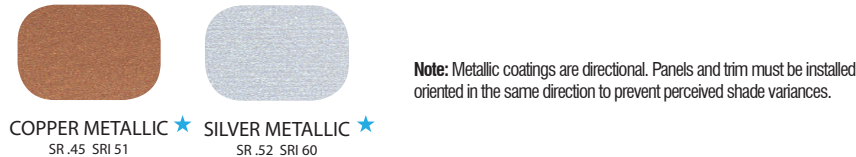

## SIGNATURE® 200 Standard Stocked Colors | SILICONIZED POLYESTER | Standard Gloss

Polar White is a Straight Polyester.



## SIGNATURE® 200 Standard Non-Stocked Colors | SILICONIZED POLYESTER



## Standard Interior Color



For complete performance specifications, product limitations and disclaimers, please consult IPS's Paint and Galvalume Plus® warranties. Upon receipt of payment in full, these warranties are available upon request for all painted or Galvalume Plus®, prime products.

All IPS Colors meet Cool Roof color standards for steep slope applications. See SR and SRI details for low slope specifications.

### Solar Reflectivity (SR)/ ENERGY STAR Requirements

Solar reflectivity or reflectance is the ability of a material to reflect solar energy from its surface back into the atmosphere. The SR value is a number from 0 to 1.0. A value of 0 indicates that the material absorbs all solar energy and a value of 1.0 indicates total reflectance. ENERGY STAR requires SR values of 0.25 or higher for steep slope roofing (greater than 2:12) and 0.65 or higher for low slope roofing (2:12 or less). For more information, please go to [www.energystar.gov](http://www.energystar.gov).

### Solar Reflectance Index (SRI)/ LEED Requirements

The SRI is used to determine compliance with LEED requirements and is calculated according to ASTM E 1980 using values for reflectance and emissivity. Emissivity is a material's ability to release absorbed energy. To meet LEED requirements, a roofing material must have an SRI of 29 or higher for steep slope (greater than 2:12) roofing and an SRI value of 78 or higher for low slope (2:12 or less) roofing. For more information, please go to [www.usgbc.org](http://www.usgbc.org).

- Color shown may vary slightly from the actual color. Final color selection should be made from actual color chips. Please call IPS for a metal color chip to verify color selection.
- For the most current information available, visit our website at [www.insulated-panels.com](http://www.insulated-panels.com).
- Heavier gauges, narrower widths, striations and embossing minimize "oil canning."
- A 25-year limited paint warranty available for all colors upon written request. (Outside the continental United States, please inquire.)
- Signature® is a registered trademark of NCI Group, Inc. KYNAR 500® is a registered trademark of Arkema, Inc. HYLAR 5000® is a registered trademark of Solvay Solexis.

